


永茂建机
YONGMAO

STT553
24/20/18t

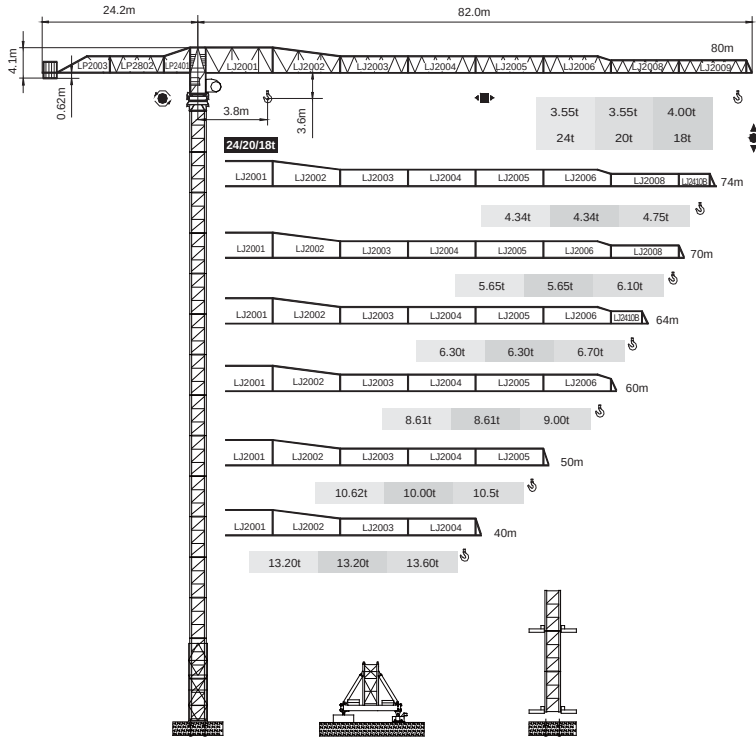

Topless

V 5.0-09112014

平頭系列

0 0
1 1
5 6

Topless STT553


Topless STT553

STT553
24/20/18t

載荷表 Load Chart


24t

		Q-24-A(B)-1-V1.0											
R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	30	40	44	50	54	60	64	70	74	80
80	UU	15.48	24.00	10.84	7.48	6.57	5.49	4.91	4.18	3.77	3.25	2.94	2.55
	U	29.62	12.00	11.83	8.47	7.57	6.49	5.90	5.18	4.77	4.24	3.94	3.55
74	UU	16.60	24.00	11.76	8.16	7.19	6.04	5.42	4.65	4.21	3.66	3.34	
	U	31.81	12.00	12.00	9.20	8.23	7.07	6.44	5.66	5.22	4.66	4.34	
70	UU	19.16	24.00	14.17	9.96	8.82	7.46	6.73	5.81	5.30	4.65		
	U	36.91	12.00	12.00	10.95	9.81	8.46	7.73	6.81	6.30	5.65		
64	UU	19.16	24.00	14.17	9.95	8.82	7.46	6.73	5.81	5.30			
	U	36.91	12.00	12.00	10.95	9.81	8.46	7.72	6.81	6.30			
60	UU	23.19	24.00	17.83	12.67	11.28	9.62	8.73	7.61				
	U	44.91	12.00	12.00	12.00	10.62	9.73						
50	UU	23.19	24.00	17.82	12.67	11.28	9.62						
	U	44.91	12.00	12.00	12.00	10.62							
40	UU	23.97	24.00	18.53	13.20								
	U	40.00	12.00	12.00	12.00								



20t

		Q-20-A(B)-1-V1.0											
R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	30	40	44	50	54	60	64	70	74	80
80	UU	18.08	20.00	10.84	7.48	6.57	5.49	4.91	4.18	3.77	3.25	2.94	2.55
	U	34.67	10.00	10.00	8.47	7.57	6.49	5.90	5.18	4.77	4.24	3.94	3.55
74	UU	19.39	20.00	11.79	8.18	7.21	6.05	5.43	4.65	4.22	3.66	3.34	
	U	37.28	10.00	10.00	9.21	8.23	7.07	6.44	5.66	5.22	4.66	4.34	
70	UU	22.42	20.00	14.17	9.96	8.82	7.46	6.73	5.81	5.30	4.65		
	U	43.30	10.00	10.00	10.00	9.82	8.46	7.73	6.81	6.30	5.65		
64	UU	22.42	20.00	14.17	9.96	8.82	7.46	6.73	5.81	5.30			
	U	43.30	10.00	10.00	10.00	9.82	8.46	7.73	6.81	6.30			
60	UU	27.17	20.00	17.83	12.67	11.28	9.62	8.73	7.61				
	U	52.70	10.00	10.00	10.00	10.00	9.72						
50	UU	27.46	20.00	18.02	12.74	11.32	9.62						
	U	50.00	10.00	10.00	10.00	10.00							
40	UU	28.65	20.00	18.91	13.20								
	U	40.00	10.00	10.00	10.00								



Topless STT553



YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED



STT553
24/20/18t

18t				Q-18-A(B)-1-V1.0									
R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	30	40	44	50	54	60	64	70	74	80
80	☞	20.60	18.00	11.74	8.40	7.50	6.42	5.84	5.12	4.71	4.19	3.89	3.50
	☞	38.70	9.00	9.00	8.68	7.82	6.79	6.24	5.55	5.16	4.66	4.37	4.00
74	☞	21.39	18.00	12.59	9.02	8.07	6.93	6.31	5.54	5.12	4.57	4.25	
	☞	41.56	9.00	9.00	9.00	8.45	7.35	6.75	6.01	5.59	5.06	4.75	
70	☞	25.60	18.00	15.07	10.88	9.75	8.40	7.67	6.76	6.25	5.60		
	☞	49.10	9.00	9.00	9.00	9.00	8.82	8.11	7.23	6.74	6.10		
64	☞	25.30	18.00	14.88	10.76	9.64	8.31	7.60	6.70	6.20			
	☞	48.90	9.00	9.00	9.00	9.00	8.78	8.08	7.19	6.70			
60	☞	30.70	18.00	18.00	13.35	11.98	10.33	9.44	8.33				
	☞	60.00	9.00	9.00	9.00	9.00	9.00	9.00	9.00				
50	☞	30.60	18.00	18.00	13.43	12.10	10.50						
	☞	50.00	9.00	9.00	9.00	9.00	9.00						
40	☞	30.60	18.00	18.00	13.60								
	☞	40.00	9.00	9.00	9.00								

(t)

18

20.6m

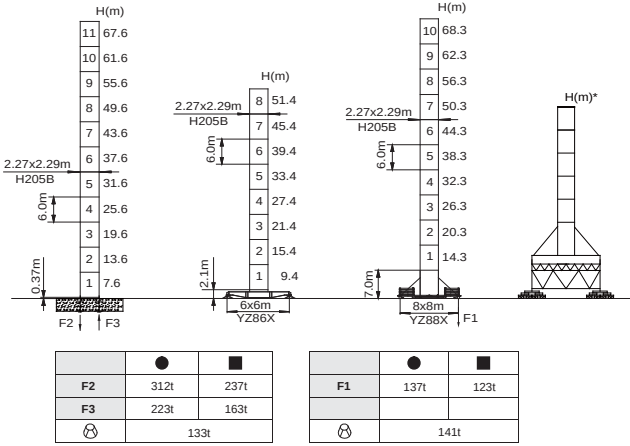


F2	●	312t	237t
	☞	133t	
F3	●	223t	163t
	☞	133t	

F1	●	137t	123t
	☞	141t	


Topless STT553

STT553
24/20/18t

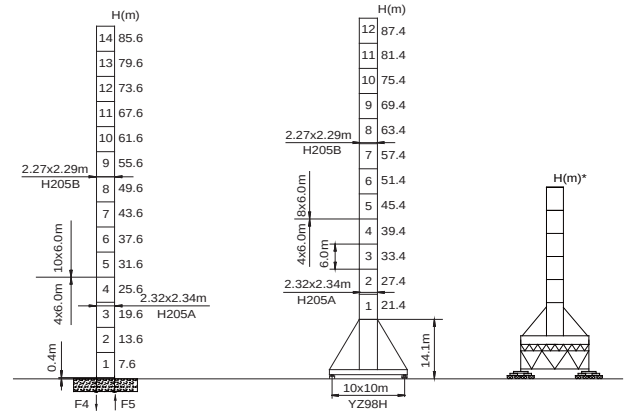

F4	●	392t	364t
	☞	155t	
F5	●	301t	280t
	☞	155t	

● 工作狀態支反力 In service reaction ■ 非工作狀態支反力 Out of service reaction
☞ 整機自由高度重量(不含平衡重及壓頭重量) Total weight of free standing crane (excludes counter weight & ballast)

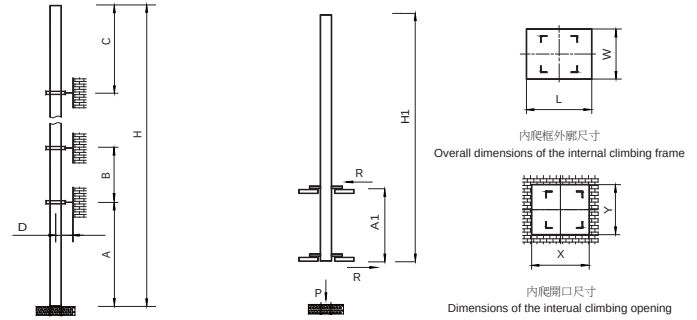

塔身節 Mast	A (m)	B (m)	C (m)	D (m)	H (m)
H205B	57	42	52.6	>4.0	400 >400*

塔身節 Mast	H1 (m)	A1 (m)	P (t)	R (t)	X (m)	Y (m)	L (m)	W (m)
H205B	61.2	20	159	42	3.28	2.4	3.5	3.02

附著道數 Number of tie collars $= (H-A-C)/B+1$
超過100m高度，需降低載荷，請與公司聯繫。
Load should be reduced when the height exceeds 100m. Please contact Yongmao for details.



YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED

STT553

24/20/18t

STT553

24/20/18t

主要性能參數 Specification

機構 Mechanism								電動機 Motor kW
			m/min	t	m/min	t		
	24t	90LFV60 ☆	0-38 0-46 0-72	12.0 10.0 4.0	0-19 0-23 0-36	24.0 20.0 8.0	550 m	90
		90LFV60DB1	0-40 0-96 0-160	12.0 4.0 1.0	0-20 0-48 0-80	24.0 8.0 2.0	1030m >1030m *	90
	20t	90LFV50 ☆	0-37 0-44 0-75	10.0 8.0 3.0	0-18 0-22 0-37	20.0 16.0 6.0	550m	90
		75LFV50DB1	0-32 0-96 0-150	10.0 3.0 1.0	0-16 0-48 0-75	20.0 6.0 2.0	1030m >1030m *	75
	18t	75LFV45 ☆	0-38 0-46 0-76	9.0 6.0 3.0	0-19 0-23 0-38	18.0 12.0 6.0	680 m	75
		75LFV45 DB1	0-40 0-96 0-160	9.0 3.0 1.0	0-20 0-48 0-80	18.0 6.0 2.0	1030m >1030m *	75
	11DFV10		0-65 m/min				11	
	7.5RFCV		0-0.8 rpm				3x145 N·m	
	RTC435 ☆		0-0.8 rpm				3x145 N·m	
	RT		12.5-25 m/min				6x2.6/5.2	

供電容量 Power supply	kVA
380V (±10%) 50 Hz	90LFV60, 90LFV60DB1, 90LFV50 : 135 75LFV50DB1, 75LFV45, 75LFV45DB1 : 115

* 與製造商聯繫 Contact us, please.

☆ 标准配置 Standard configuration.

本技術參數不受法律約束，技術資訊請詳見相應說明書。
These specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.



YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED