


ALLEN GROVE H2564

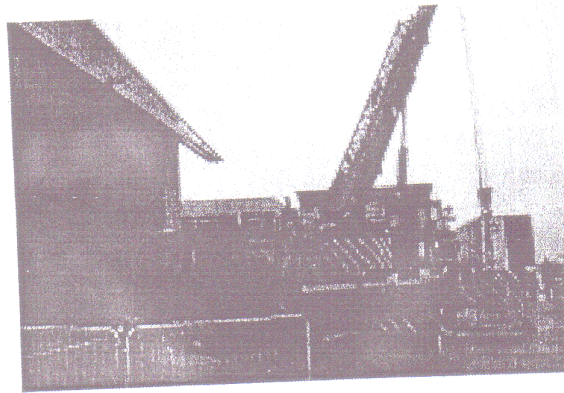

Lifting Chart

M	10m	11,6m	13,4m	15,2m	17,1m	18,9m	21,8m	28m
3	25,400	21,320	-	-	-	-	-	-
3,6	25,400	21,320	19,600	18,600	17,240	-	-	-
4,6	19,050	18,280	17,700	16,330	14,970	12,250	-	-
6,4	12,610	12,610	12,610	12,610	12,610	11,470	9,070	-
7,6	7,300	7,300	7,300	7,300	7,300	7,300	7,310	5,080
9,1	-	5,400	5,400	5,400	5,400	5,400	5,400	4,990
10,7	-	-	4,080	4,080	4,080	4,080	4,010	4,080
12,2	-	-	3,240	3,240	3,240	3,240	3,210	3,240
13,7	-	-	-	2,540	2,540	2,540	2,540	2,540
15,2	-	-	-	-	1,930	1,930	1,930	1,930
16,8	-	-	-	-	-	1,520	1,520	1,520
18,3	-	-	-	-	-	-	1,220	1,220
19,8	-	-	-	-	-	-	910	910
21,3	-	-	-	-	-	-	-	800
M	10m	12m	14m	16m	18m	20m	22m	26m

WESTERN INDIA CRANE SERVICE
 228 / 229, 2nd Floor, Devashree Garden,
 Commercial Complex, R. W. Sawant Marg,
 Majiwada, Thane (W) - 400 604
 Tel : 21720133/34/35

Ratings are valid for lifting over side and rear (270°) when outriggers are fully extended